


OHIO

PGZ Stainless Steel Weld Pin




Body Diameter - D		0.119	0.144	0.163	0.19	0.25	0.335	0.375
Tolerance		0.119 0.114	0.144 0.140	0.163 0.159	0.190 0.185	0.250 0.244	0.335 0.328	0.375 0.367
Head	A-Diameter	0.260 0.240	0.323 0.303	0.385 0.365	0.448 0.428	0.510 0.485	0.755 0.725	0.755 0.725
	H-Height	0.046 0.036	0.052 0.042	0.068 0.058	0.068 0.058	0.083 0.073	0.114 0.104	0.114 0.104
Projections	P-Diameter	0.055 0.045	0.075 0.065	0.085 0.075	0.095 0.085	0.105 0.095	0.135 0.125	0.135 0.125
	F-Height	0.022 0.018	0.027 0.023	0.032 0.028	0.037 0.033	0.042 0.038	0.052 0.048	0.052 0.048
Length Overall Tolerance To 1" +.00 -.03	1/4				PGZ 1904			
	5/16	PGZ 1105				PGZ 2505		
	3/8		PGZ 1406					
	1/2	PGZ 1108	PGZ 1408		PGZ 1908	PGZ 2508		PGZ 3708
	5/8				PGZ 1910		PGZ 3310	
	3/4	PGZ 1112		PGZ 1612		PGZ 2512		
	1					PGZ 2516		PGZ 3716

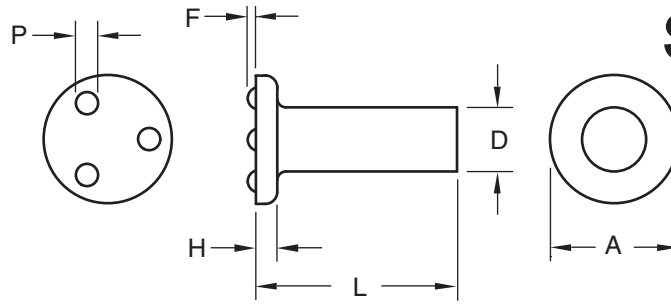

The stainless steel PGZ weld pin is to be welded permanently to the component surface. It also functions well in concealed locations and in blind applications. The cold-forged unit construction of the PGZ weld pin provides a bearing surface, hinge pin, stop or mounting pin, with great rigidity and strength.

Because the PGZ stainless steel weld pin needs no mounting hole, it improves both product appearance and durability. Other benefits which can be gained are improved product design, performance and manufacturing economy.



Recommended hole in sheet is .010 / .015 above the diameter.

Material:..... Austenitic Stainless Steel

Finish:Passivated



The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

www.BuckeyeFasteners.com

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

