


OHIO

PNZ Stainless Steel Metric Weld Nut




Part Number	Thread Size / Pitch	Width		Thickness	Length	Pilot Center To End	Pilot		Projection		Hole In Sheet
				Tol.	Tol.	Tol.	Dia. Tol.	Height	Dia. Tol.	Height Tol.	
				+ 0.1 - 0.1	+ 0.4 - 0.4	+ 0.4 - 0.4			+ 0.2 - 0.3	+ 0.1 - 0.15	
		A	Tol. "A"	B	C	D	E	F	G	H	
PNZ 04016	M4 x 0.7-6H	9.6	+ 0.3 - 0.2	2.4	15.9	4.7	5.2	0.76	4.8	0.3	5.6
PNZ 05016	M5 x 0.8-6H	9.6	+ 0.3 - 0.2	2.4	15.9	4.7	6.0	0.76	4.8	0.3	6.4
PNZ 06020	M6 x 1-6H	12.9	+ 0.3 - 0.3	3.2	20.6	6.3	7.6	1.3	5.6	0.58	8.0
PNZ 08028	M8 x 1.25-6H	16.15	+ 0.5 - 0.4	3.6	28.6	8.7	9.2	2.0	7.95	0.68	9.6

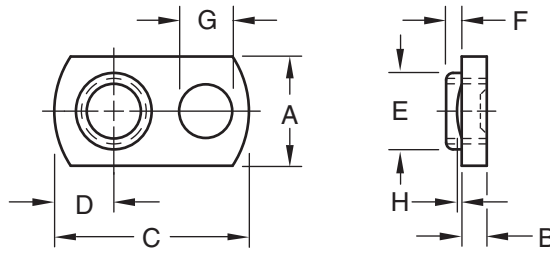

The PNZ metric stainless steel weld nut features a strong single button projection which gives a deeper, more penetrating weld than is ordinarily obtained from other types of projections. Thus, the PNZ is ideal for use with heavier gage material.

The PNZ weld nut is easy to position on both flat and curved surfaces and has a self-locating pilot that provides more thread depth. Use of the PNZ nut assures a positive and permanent fastener foundation.



Material: Austenitic Stainless Steel Finish: Passivated

Threads: ASME B1.13M-2005



The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

www.BuckeyeFasteners.com

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

