


OHIO

RNZ


Stainless Steel Weld Nut

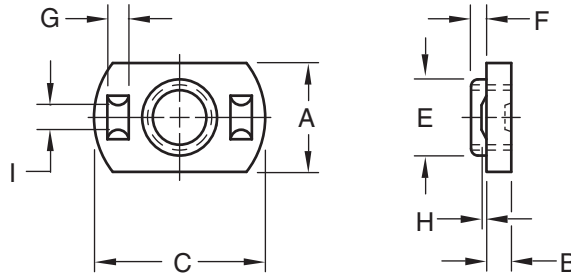

Part Number	Thread Size	Width	Thickness	Length	Pilot		Projection			Hole In Sheet
					Dia.	Height	Width	Height	Length	
		A	B	C	E	F	G	H	I	
RNZ 1410	#8-32	0.390	0.097	0.640	0.213	0.03	0.099	0.014	0.109	0.219
		0.370	0.091	0.610	0.193		0.089	0.010	0.079	
RNZ 1510	#10-24	0.390	0.097	0.640	0.244	0.03	0.099	0.014	0.109	0.250
		0.370	0.091	0.610	0.224		0.089	0.010	0.079	
RNZ 1710	#10-32	0.390	0.097	0.640	0.244	0.03	0.099	0.014	0.109	0.250
		0.370	0.091	0.610	0.224		0.089	0.010	0.079	
RNZ 2113	1/4-20	0.520	0.128	0.827	0.307	0.05	0.130	0.025	0.140	0.312
		0.495	0.122	0.797	0.287		0.120	0.021	0.110	
RNZ 2213	1/4-28	0.520	0.128	0.827	0.307	0.05	0.130	0.025	0.140	0.312
		0.495	0.122	0.797	0.287		0.120	0.021	0.110	
RNZ 2716	5/16-18	0.655	0.146	0.999	0.369	0.08	0.130	0.029	0.156	0.375
		0.620	0.138	0.969	0.349		0.120	0.025	0.126	
RNZ 2816	5/16-24	0.655	0.146	0.999	0.369	0.08	0.130	0.029	0.156	0.375
		0.620	0.138	0.969	0.349		0.120	0.025	0.126	
RNZ 3316	3/8-16	0.655	0.146	0.999	0.448	0.09	0.130	0.029	0.156	0.453
		0.620	0.138	0.969	0.428		0.120	0.025	0.126	
RNZ 3416	3/8-24	0.655	0.146	0.999	0.448	0.09	0.130	0.029	0.156	0.453
		0.620	0.138	0.969	0.428		0.120	0.025	0.126	
RNZ 4418	1/2-13	0.797	0.166	1.140	0.599	0.09	0.130	0.031	0.154	0.609
		0.734	0.146	1.110	0.559		0.120	0.025	0.094	



The slim, clean lines of the stainless steel RNZ weld nut, with its self-locating pilot, has earned wide acceptance among designers of stainless steel products. The RNZ nut has a pair of rib projections which are precisely located on either side of the threaded hole. This feature assures equal strength when tension is against the weld. A precision pilot greatly speeds feeding by locating itself quickly and positively in the hole. As a result of the pilot being held to close tolerances, the RNZ nut is ideal for extreme accuracy demanded in automated production lines. The stainless steel RNZ nut has good thread depth to provide strong secure thread engagement.



Material: Austenitic Stainless Steel

Finish: Passivated

Threads: Unified Standard Class 2B
ASME B1.1-2003



The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

www.BuckeyeFasteners.com

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

