


# OHIO


# SNZ Stainless Steel Weld Nut



Part Number	Thread Size	Width	Thickness	Length	Pilot		Center Hole To Short End	Hole In Sheet
					Dia.	Height		
					A	B		
SNZ 1406	#8-32	0.390	0.097	0.640	0.213	0.03	0.202	0.219
		0.370	0.091	0.610	0.193		0.172	
SNZ 1506	#10-24	0.390	0.097	0.640	0.244	0.03	0.202	0.250
		0.370	0.091	0.610	0.224		0.172	
SNZ 1706	#10-32	0.390	0.097	0.640	0.244	0.03	0.202	0.250
		0.370	0.091	0.610	0.224		0.172	
SNZ 2113	1/4-20	0.520	0.128	0.827	0.307	0.05	0.265	0.312
		0.495	0.122	0.797	0.287		0.235	
SNZ 2213	1/4-28	0.520	0.128	0.827	0.307	0.05	0.265	0.312
		0.495	0.122	0.797	0.287		0.235	
SNZ 2718	5/16-18	0.655	0.146	1.140	0.369	0.08	0.359	0.375
		0.620	0.138	1.110	0.349		0.329	
SNZ 2818	5/16-24	0.655	0.146	1.140	0.369	0.08	0.359	0.375
		0.620	0.138	1.110	0.349		0.329	
SNZ 3318	3/8-16	0.655	0.146	1.140	0.448	0.09	0.359	0.453
		0.620	0.138	1.110	0.428		0.329	
SNZ 3418	3/8-24	0.655	0.146	1.140	0.448	0.09	0.359	0.453
		0.620	0.138	1.110	0.428		0.329	

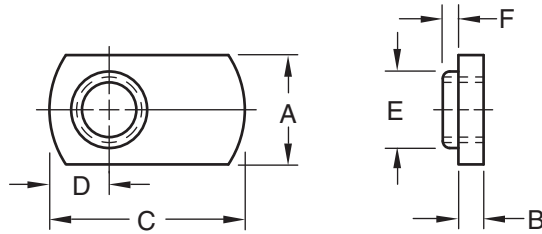

The stainless steel SNZ weld nut is a spotweld, precision-pilot nut which features an optimum welding tab. This tab will take several sizes of electrodes and permits use of the same equipment, settings and electrodes used to produce your product or product components. Where the nut is to function as a stiffener or brace in addition to being a stainless steel fastener, the SNZ weld nut is ideal.



Material: ..... Austenitic Stainless Steel

Finish: ..... Passivated

Threads: ..... Unified Standard Class 2B  
ASME B1.1-2003

## The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

[www.BuckeyeFasteners.com](http://www.BuckeyeFasteners.com)

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

